


AQ Series

Automatic Quad Drive Carton Sealer

The BestPack AQ Series is an operator-free, carton sealer designed to meet the needs of uniform in-line carton closure applications. The four belt drives are powered by three electric 110V UL approved motors. The quad-belt technology allows for more carton stability and effective sealing in rugged applications. The AQ model, that closes all top flaps and seals the top & bottom of the carton, is designed with a stable four-column support structure, and uses 45-60 PSI and 4-5 SCFM of air.

Our AQ line incorporates our exclusive 2" or 3" pop-out pressure-sensitive "High Speed" tape heads with BestPack's patented tab adjustment. All BestPack units are available in our standard baked enamel finish and food grade 304 stainless steel for 21 CFR 110 compliance.

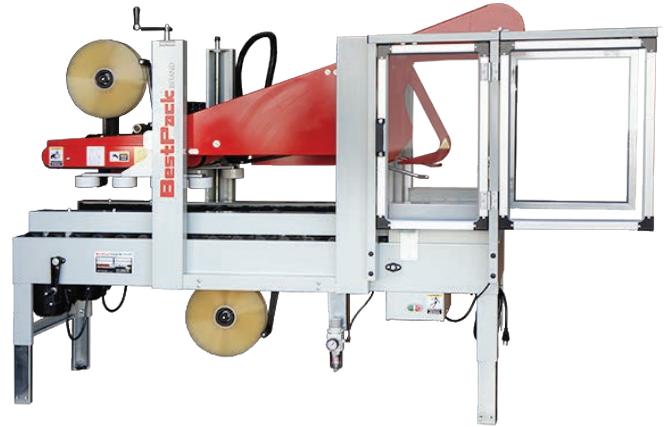

Key Points of the Carton Sealer



**No Operator
Required**



Uniform Cartons



Top & Bottom Seal


Features

- Operator Free Design
- Designed for Uniform Carton Applications
- In-line Carton Closure
- Automatic Flap-folding
- Adjustable Bed Height from: 22.5" to 30.0"
- Height/Width Adjustments on Either Side of Carton Sealer
- Upper Side Compression Unit
- Interlock Safety Gates in the Kicker Station
- Tape Roll Lengths: 1,000 yd., 1,500 yd., 2,000 yd.
- Heavy Duty Frame
- UL Approved Electrical Parts
- Capable of Interchanging 2" or 3" Tape Heads

Options

- Spare Parts Kit
- Compatible Indexer: ARX Model
- High Speed Motor Upgrade (Up to 125 ft. per min.)
- Infeed/Exit Conveyor w/ L-Bracket Stabilizer
- Low or No Tape Sensor
- Interlock Safety Gates for the Major Flap Folding and Sealing Stations
- Food Grade 304 Stainless Steel

Extra Accessories to Improve Efficiency

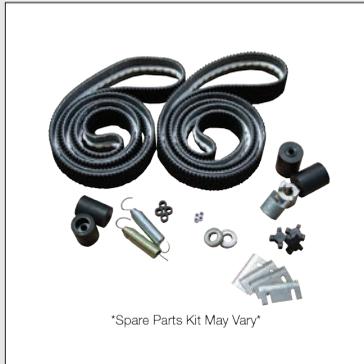

Spare Parts Kit



Indexer Station



Locking Casters



Spare Tape Head

- High Speed Motor Upgrade (Up to 125 ft. per min.)
- Long Infeed/Exit Conveyor w/L-Bracket Stabilizer
- Food Grade 304 Stainless Steel
- Low or No Tape Sensor
- Carton Sealing Tape

Machine & Carton Specifications

110 Volts 60 Hz
Power Requirements

Up to 57 Cartons/min.
Speed

45 - 60 PSI
4 - 5 SCFM
Air Requirements

632-657 lbs
Shipping Weight

Model	Machine Dimensions Length x Width x Height	Carton Range*** Length (min. - max.) x Width (min. - max.) x Height (min. - max.)	Conveyor Height Adjustment Height (min. - max.)	Cartons per min.****	Shipping Weight (lbs.)
AQ12-2 2" Tape Head	(70.2") x (26.5") x (68.0")*	(6.0" - 25.5") x (7.5" - 14.0") x (6.5" - 20.0")	(22.5" - 30.0")	Up to 34	632
AQ12-2H** 2" Tape Head	(70.2") x (26.5") x (68.0")*	(6.0" - 25.5") x (7.5" - 14.0") x (6.5" - 20.0")	(22.5" - 30.0")	Up to 57	632
AQ12-3 3" Tape Head	(70.2") x (26.5") x (68.0")*	(6.0" - 25.5") x (7.5" - 14.0") x (6.5" - 20.0")	(22.5" - 30.0")	Up to 34	632
AQ12-3H** 3" Tape Head	(70.2") x (26.5") x (68.0")*	(6.0" - 25.5") x (7.5" - 14.0") x (6.5" - 20.0")	(22.5" - 30.0")	Up to 57	632
AQ22-2 2" Tape Head	(77.5") x (33.8") x (73.0")*	(6.0" - 27.5") x (7.5" - 20.0") x (5.5" - 20.0")	(23.5" - 30.0")	Up to 34	645
AQ22-2H** 2" Tape Head	(77.5") x (33.8") x (73.0")*	(6.0" - 27.5") x (7.5" - 20.0") x (5.5" - 20.0")	(23.5" - 30.0")	Up to 57	645
AQ22-3 3" Tape Head	(77.5") x (33.8") x (73.0")*	(6.0" - 27.5") x (7.5" - 20.0") x (5.5" - 20.0")	(23.5" - 30.0")	Up to 34	645
AQ22-3H** 3" Tape Head	(77.5") x (33.8") x (73.0")*	(6.0" - 27.5") x (7.5" - 20.0") x (5.5" - 20.0")	(23.5" - 30.0")	Up to 57	645
AQ33-3 3" Tape Head	(83.0") x (43.0") x (81.0")*	(6.0" - 27.5") x (7.5" - 27.5") x (6.0" - 30.0")	(23.5" - 30.0")	Up to 34	657
AQ33-3H** 3" Tape Head	(83.0") x (43.0") x (81.0")*	(6.0" - 27.5") x (7.5" - 27.5") x (6.0" - 30.0")	(23.5" - 30.0")	Up to 57	657

*Safety Gates are an additional 20" Long **High Speed ***Outside Dimensions Only **** Based on a 12" Long Carton