

 **Vortex Series** • High Efficiency Shrink Tunnels



Vortex 48 shown

MADE IN USA



High Performance Automatic Shrink Packaging Systems

Conflex® Flexible People make Flexible Systems

Engineered for maximum flexibility, reliability and performance. Conflex® shrink packaging equipment incorporates leading-edge technology to take on the toughest shrink packaging challenges.

Highly Efficient...and Flexible

The Conflex Vortex Series of shrink tunnels puts the heat where it belongs...in the chamber...not circulating through baffles heating up areas of the tunnel that don't need heat. This gives the user excellent shrink appearance while minimizing power consumption. The consistent tunnel air temperature and uniform airflow offer superior shrink results.

Conflex® Vortex Series Features and Benefits

- **Low Power Consumption** - Easy on your electrical bill for quick ROI.
- **Independently Adjustable Air Flow Fans** - Gentle air flow for light product to a high air flow for products that need it.
- **Viewing Window** - Standard feature because you need to see the product to make it look good.
- **Lighted Chamber** - Makes it easier to perfect the appearance of the package.
- **Cool to the touch** - Efficiently insulated to save power and keep the heat where it belongs.
- **Casters and Leg Levelers** - Standard Equipment.
- **UL listed Electrical Panel**
- **Lower Shrink Temperatures** - Efficient heat vortex design
- **Variable Speed Conveyor** - Speeds to 100 feet per minute.
- **Durable Stainless Steel Conveyor Belt** - Standard

Options Available


- **480 volt / Export Voltages**
- **Composite Conveyor Belt / Teflon Mesh Conveyor Belt**
- **Cooling Fans for Polyethylene**
- **Deck Height Extension Kit**
- **Right Hand Controls**
- **Additional Viewing Window**
- **Stainless Steel Construction**

Conflex® Vortex Series Specifications


	V48	V72
Electrical Requirements:	230 Volts, 28 Amps, 3 phase	230 Volts, 50 Amps, 3 phase
Air Requirements:	None	None
Chamber Dimensions:	25"W x 13" H x 48L"	25"W x 13" H x 72L"
Conveyor Dimensions:	24" W x 80" L	24" W x 104" L
Overall Machine Dimensions:	81" L x 51" W x 60" H	105" L x 51" W x 60" H
Maximum Operating Speeds:	100 feet per min.	100 feet per min.
Deck Height on Casters:	34" - 39"	34" - 39"

Conflex® Vortex Series Plan View

Vortex 48

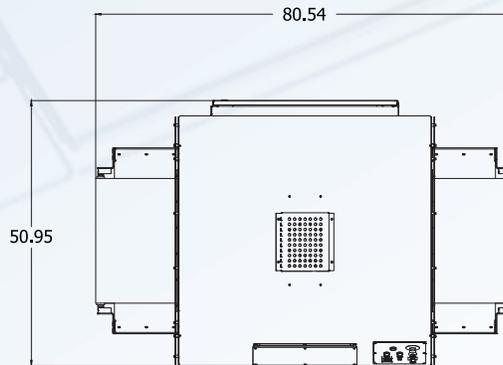

Vortex 72

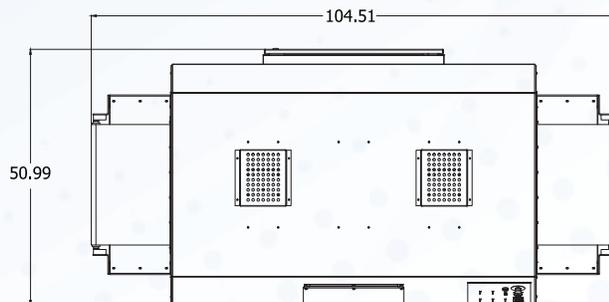

The Conflex® engineering department is available to customize machinery for special product applications.

Distributed By:



Conflex Incorporated
Manufacturing Facility:
W130 N 10751 Washington Dr.
Germantown, WI 53022

Toll Free: 800-225-4296
Fax: 262-512-1665
Email: info@conflex.com
www.conflex.com

